

HONDA

CBR 600RR (PC40) my 13/18

(no abs)

product	code	description
Steering damper kit	SD.H225R	SDR (stock)
Monoshock (C-R-L-P)	MH229.07K	M46K std
Monoshock (C-R-L-HP)	MH229.07P	M46K+P1 flex-hydraulic spring preload
Monoshock (CH-CL-R-L-HP)	MH229.07R	M46R Racing (P1 hydraulic unit)
Fork kit (fork type Showa BPF)	FH232RK-BP1	FRK Hydraulic kit (step1)
Fork kit (fork type Showa BPF)	FH232RK-BP2	FRK Hydraulic kit (step2)
Fork kit (C-R-P) (fork type Showa BPF)	F25H232R-BP	F25R-BP "classic" Hydraulic Cartridge kit
Fork kit (C-R-P) (fork type Showa BPF)	F25H232SA	F25SA "sealed" Hydraulic Cartridge kit



Dark Series on demand




High speed
Low speed
Compression
adjustment



Compression
adjustment



Flex-hydraulic
spring preload



Rebound
adjustment



Length
adjustment



CH = HighSpeed Compression adj. / regolazione Compressione AV
CL = LowSpeed Compression adj. / regolazione Compressione BV
C = Compression adjustment / regolazione Compressione
R = Rebound adjustment / regolazione Estensione
L = Length adjustment / regolazione Interasse
P = spring Preload / precarico molla
HP = hydraulic spring éreload / precarico molla idraulico

F25SA sealed fork cartridge kit

Quad-valve asymmetric system



Rebound unit
(range: 38 clicks)



Preload unit
(range: 15 mm)



Compression unit
(range: 38 clicks)




on demand
the technopolymer fork cap tools

TF2 fork cap tool 36 (8 sides)



TF3 fork cap tool 28 (6 sides)

FRK-BP step 1

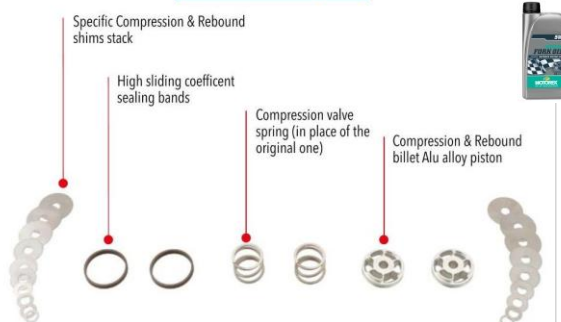

F25R-BP classic fork cartridge kit

Quad-valve asymmetric system



Compression unit
(range: 38 clicks)




Preload unit
(range: 15 mm)



Rebound unit
(range: 38 clicks)



FRK-BP step 2

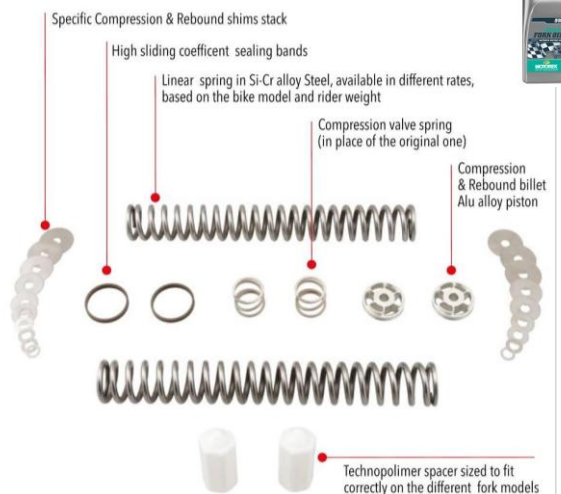

SD-R

