

YAMAHA

XSR 900GP (RN96) my 24/-

product	code	description
Steering damper kit	SD.Y127K	SDK (side)
Steering damper kit	SD.Y127R	SDR (side)
Monoshock (C-R-L-P)	MY155.32K	M46K std
Monoshock (C-R-LHP)	MY155.32ID	M46K+ID Hydraulic Spring Preload
Monoshock (CH-CL-R-L-P)	MY155.28Rr	M46R Racing (standard ring preload unit)
Monoshock (CH-CL-R-L-HP)	MY155.28R	M46R Racing (ID preload unit)
Fork kit (fork type Kayaba)	FY160KS	FKS Spring kit
Fork kit (fork type Kayaba)	FY160RK	FRK Hydraulic kit
Fork kit (C-R-P) (fork type Kayaba)	F20Y160K	F20K "quad valve" Hydraulic Cartridge kit
Fork kit (C-R-P) (fork type Kayaba)	F25Y160RX	F25R-X "quad valve" Hydraulic Cartridge kit
Fork kit (C-R-P) (fork type Kayaba)	F25Y160SA	F25SA "sealed" Hydraulic Cartridge kit



High speed
Low speed
Compression
adjustment



Compression
adjustment



Hydraulic
spring
preload unit



Rebound
adjustment



Length
adjustment



M46R



M46K-ID


Dark Series
on demand



SD-R

SD-K

CH = HighSpeed Compression adj. / regolazione Compressione AV
CL = LowSpeed Compression adj. / regolazione Compressione BV
C = Compression adjustment / regolazione Compressione
R = Rebound adjustment / regolazione Estensione
L = Length adjustment / regolazione Interasse
P = spring Preload / Precarico molla
HP = hydraulic spring Preload adjustment / Precarico molla idraulico

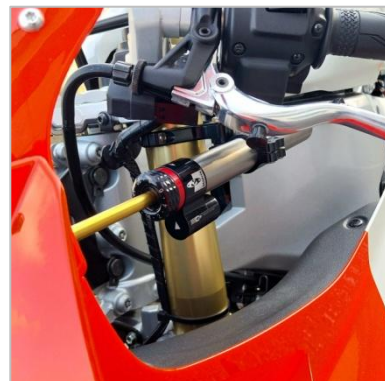

YAMAHA XSR 900GP (RN96) my 24/-



F25SA Sealed cartridge asymmetric system



Rebound unit
(range: 38 clicks)



Preload unit
(range: 15 mm)



Compression unit
(range: 38 clicks)



F25R-X Quad-valve asymmetric system



Compression unit
(range: 38 clicks)



Preload unit
(range: 15 mm)



Rebound unit
(range: 38 clicks)




F20K Quad-valve asymmetric system



Compression unit
(range: 38 clicks)



Preload unit
(range: 15 mm)



Rebound unit
(range: 38 clicks)



on demand
the technopolymer
fork cap tools


TF2 fork cap tool 36 (8 sides)



TF3 fork cap tool 28 (6 sides)



FRK Fork kit

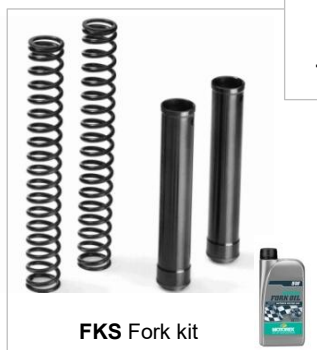

FKS Fork kit